



ROOT RAKE

For Skid Steer Loaders

Bradco Root Rake, by Paladin, allows you to remove the toil and leave the soil at your job site with aggressive tine and grapple profiles that lock material in place and stabilize during transport.





- Leading edge of the grapple travels in a range of motion that pulls material into the bucket area to optimize its large capacity for brush and debris
- Constructed of high strength material with replaceable pin-on H&L style teeth for durability, serviceability, and extended life
- Pilot operated check for positive lock clamping
- Replaceable hardened steel bushings at all pivot locations
- Weld-on D-ring for countless applications

ROOT RAKE

- Available in 72", 78" and 84" for maximum efficiency
- Upper push-bar, aggressive profiles with H&L-230 style teeth work together to neatly gather material into a more manageable pile
- Zinc plated, greasable, pivot pins with protected grease zerks, & replaceable hardened steel bushings
- Weld-on D-ring for numerous applications
- Rake Heel keeps attachment upright and stable during storage. Also doubles as a scarifier for busting up dirt clumps or working and loosening the ground

| Specifications | 72" | 78" | 84" |
|--|-------------|-------|-------------|
| A. Width (overall grapple) | 70" | 70" | 70" |
| B. Rake Width | 72" | 78" | 84" |
| C. Height (overall) | 38" | 38" | 38" |
| D. Grapple Opening | 49" | 49" | 49" |
| E. Tooth Position | 25" | 25" | 25" |
| F. Length (overall) | 27" | 27" | 27" |
| Weight (lbs) varies depending on mount | 1,100-1,300 | 1,140 | 1,225-1,475 |
| Tine Spacing | 9.5" | 10" | 8.5" |

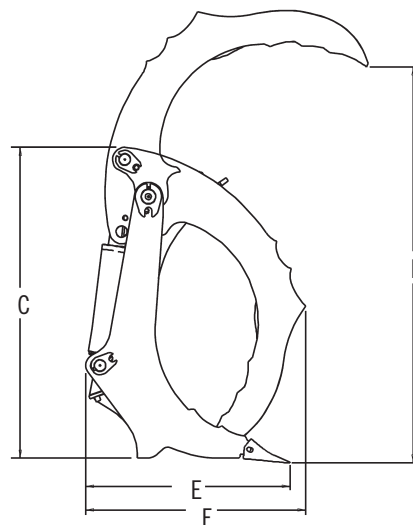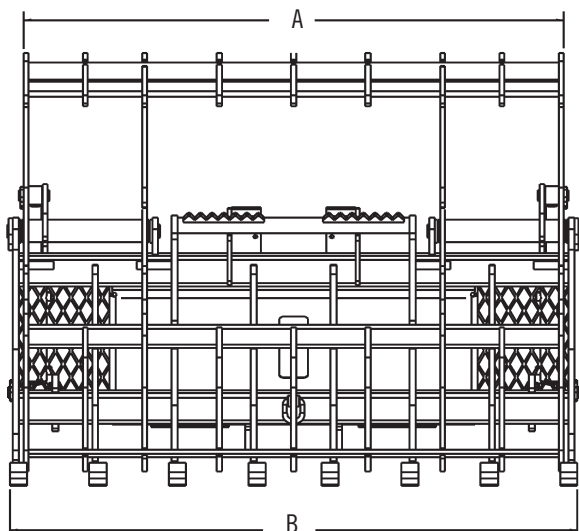

Specifications and design are subject to change without notice and without liability therefore.
Whenever applicable specifications are in accordance with SAE standards.

When work needs to get done you need to be able to depend on your equipment. Our root rakes are designed for maximum reliability, durability, and productivity.