



D1703-M

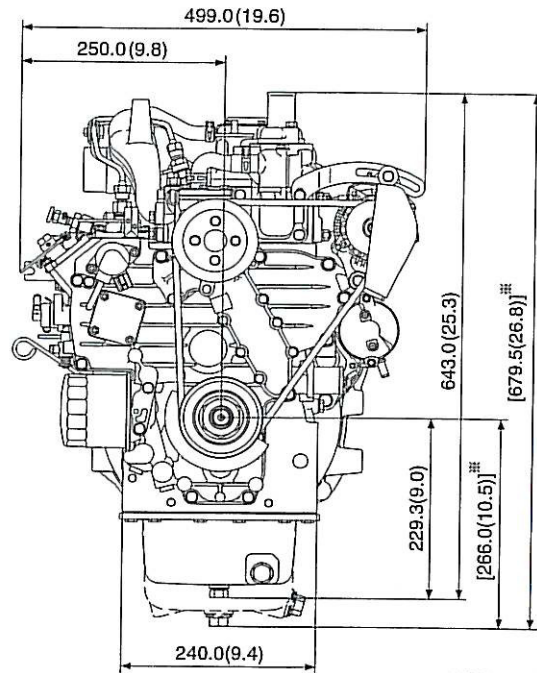

Dimensions mm(in.)

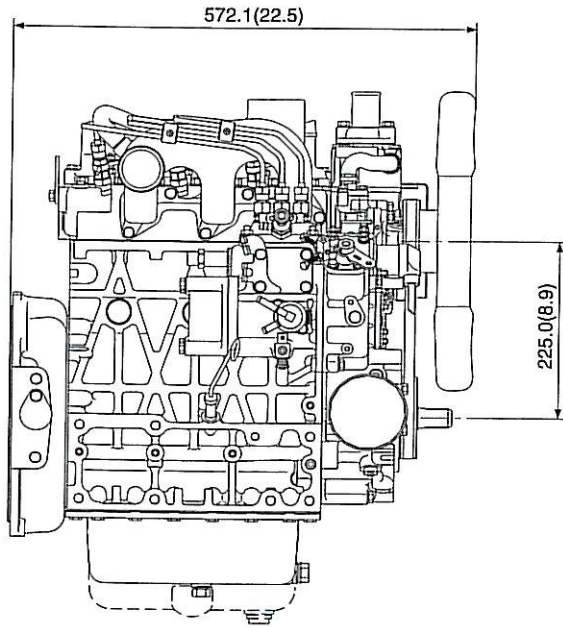


※[]For EU

Specifications

Model		D1703-M
Cylinders		3
Bore x Stroke	mm (in.)	87 {3.43} x 92.4 {3.64}
Displacement	L (cu. in.)	1.647 (100.5)
Combustion / Intake system		E-TVCS, NA
Cooling system		Liquid-Cooled
Starter		V-kW 12-1.4
Speed		rpm 2800
Output	Gross intermittent	27.4 {36.7} {37.3}
	Net intermittent	25.7 {34.5} {35.0}
	Net continuous	22.4 {30.0} {30.4}
Dimensions	Length	mm (in.) 572.1 (22.5)
	Width	mm (in.) 499.0 (19.6)
	Height1	mm (in.) 643.0 (25.3)
	Height2	mm (in.) 229.3 (9.0)
Dry Weight		kg (lb) 148.0 (326.3)

Performance Curve

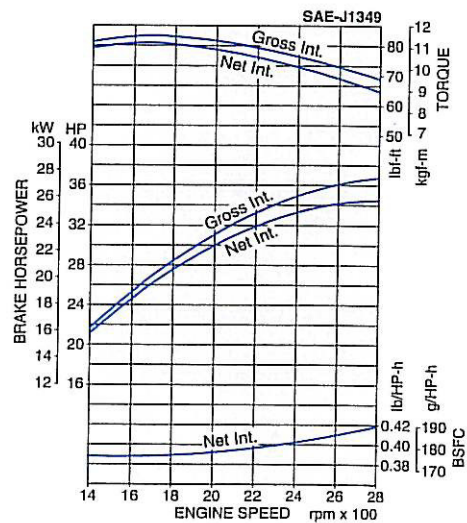

*Specifications are subject to change without notice.

*Dry weight is according to Kubota's standard specifications.

*Gross Intermittent: 1-hour rating based on engine without cooling fan, air cleaner and muffler, with alternator (Idling). (SAE J1995)

*Net Intermittent: 1-hour rating based on engine with standard cooling fan, air cleaner, muffler, and alternator (Idling). (SAE J1346, ISO 3046 IFN)

*Net Continuous: Continuous rating based on engine with standard cooling fan, air cleaner, muffler, and alternator (Idling). (ISO 3046 IC15N)

*Atmospheric Condition: Ambient temperature 25°C, Relative humidity 30%, Barometric pressure 750 mm Hg (100 kPa)

*Conversion Formula: HP=0.746 kW, PS=0.7355 kW

*Height 1 : Overall Height

*Height 2 : From crankshaft center to lower edge of engine.