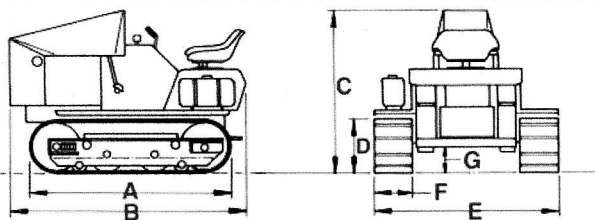


Specifications & Ratings

MH4800

MH8000

Engine	25 HP Kohler Command, "V" twin cylinders [Gasoline]	31 HP Briggs & Stratton Vanguard, "V" twin cylinders [Gasoline] <i>[35HP Engine Upgrade ENG35 available; see page 2]</i>
Air Cleaner	Paper element, oiled foam precleaner	5" Donaldson cyclonic multi-stage
Track Drive Pump	0.775 cubic inch displacement, 12.08 GPM at 3600 RPM	1.01 cubic inch displacement, 15.7 GPM at 3600 RPM
Attachment Pump	Not available	0.500 cubic inch displacement, 7.8 GPM @ 3600 RPM
Gas Tank	Remote with fuel pump, 4.5 gal. capacity	Remote with fuel pump, 5 gal. capacity
Hydraulic Oil Cooler	Internally mounted, engine fan cooled (optional electric booster fan available). Cooling Core Area - 126 sq. in.	Externally mounted, 16" engine fan cooled, Cooling Core Area -190 sq. in.
Attachment Valve	Expandable Four (4) sectional valve	Expandable Five (5) section valve Regular Drive: 15.7 GPM @ 3000 PSI Overdrive: 23.5 GPM @ 3000 PSI
Track Motors	10.6 cubic inch displacement, rated at over 3500 PSI	10.6 cubic inch displacement, rated at over 3500 PSI
Travel Speed	Regular Drive.....1.82 MPH Overdrive not available	Regular Drive..... 2.4 MPH Overdrive 3.5 MPH
Instrumentation	Hydraulic oil temp. amp & hour gauges	Hydraulic oil temp. amp & hour gauges
Chain Sprockets	Induction hardened steel	Induction hardened steel
Track Sprockets	AR200 pre-hardened steel, plasma cut	AR200 pre-hardened steel, plasma cut
Track Rollers	4-1/2" diameter, 5/8" thick flanges, Solid steel (3) per side	4-1/2" diameter, 5/8" thick flanges, Solid steel (5) per side
Track Chain	Double lengths #551X Chain, 40,000 ultimate strength per Track	Double lengths #551X Chain, 40,000 ultimate strength per Track
Track Shoes	9-1/2" wide, 7/16" diameter overall laminated thickness, Grouser and Non-Marking options	9-1/2" wide, 7/16" diameter overall laminated thickness, Grouser and Non-Marking options
Primary Drive Chain	50H 7,800 lbs. tensile strength	60R 9,200 lbs. tensile strength
Final Drive Chain	80HK, 22,046 lbs. tensile strength	80HK, 22,046 lbs. tensile strength
Axle Diameters	7/8" dia. on Idlers; 1-3/16" diameter on Track Sprockets	7/8" dia. on Idlers; 1-3/16" diameter on Track Sprockets
Park & Emgr. Brake	Dual 8" diameter disk type	Dual 8" diameter disk type
Battery	295 CCA	750 CCA
Weight (no attach's)	1685 lbs.	2100 lbs.
Track Tensioning	Industrial grade coiled steel springs (4)	Industrial grade coiled steel springs (4)
Track Ground Contact	5.36 sq. ft.	5.36 sq. ft.
Overdrive	Not Available	Continuous Use
Seat	Low Back, Rotatable, multiple height settings with Pin.	High Back, Rotatable, multiple height settings with Pin
HC74 Hydro Circuit	Optional	Included

		4800	A	B	C	D	E	F	G
	8000	55-7/8"	57"	43"	15-1/8"	48-7/8"	9-1/2"	6"	
	55-7/8"	62-1/2"	51"	15-1/8"	48-7/8"	9-1/2"	6"		

C.F. STRUCK CORP. has a policy of continuous product improvement and reserves the right to change its products, specifications and dimensions at any time without notice or obligation. All dimensions and specifications are based upon best possible performance using the highest performance components available and running at 100% efficiency. Results will vary due to changes in size of engine and components, component wear, oil temperature, etc. If a particular specification or dimension is critical to your application contact the factory for more detailed information.

PAYMENT TERMS

Payment in form of Cashier's Check, Money Order, Visa, Mastercard, Discover or Wire Transfer. 30% deposit required when placing order; payment in full & warranty acknowledgment required before shipment. Prices do not include transportation charges or any state or local taxes. Prices quoted are F.O.B. factory in Cedarburg, WI 53012. All Prices and Specifications are subject to change without notice or obligation.