

[3] SPECIFICATIONS OF IMPLEMENT LIMITATIONS

The Kubota Tractor has been thoroughly tested for proper performance with implements sold or approved by KUBOTA. Use with implements which exceed maximum specifications listed below, or otherwise unfit for use with the Kubota Tractor may result in malfunctions or failures of the tractor,

damage to other property and injury to the operator or others.

[Any malfunctions or failures of the tractor resulting from use with improper implements are not covered by the warranty.]


Model	Tread (max width)			Lower link end lift capacity Wo
	Front		Rear	
	2WD	4WD		
L3350	—	1265 mm (50 in.)	1720 mm (68 in.)	1550 kg (3420 lbs.)
L3750	1820 mm (72 in.)	1320 mm (52 in.)	1930 mm (76 in.)	
L4150		1420 mm (56 in.)		

Model	Actual Figures			
	Trailer loading weight W_2 Max. capacity		Max. Drawbar load W_3	Lift capacity 610mm (24 in.) behind lower link end W_1
	2WD	4WD		
L3350	—	2500 kg (5500 lbs.)	1000 kg (2200 lbs.)	1200 kg (2650 lbs.)
L3750	3000 kg (5500 lbs.)			
L4150				

Lower link end lift capacity W_0

Implement weight The implement's weight which can be put on the links: W_1

Trailer loading weight The max. loading weight for trailer (without trailer's weight): W_2

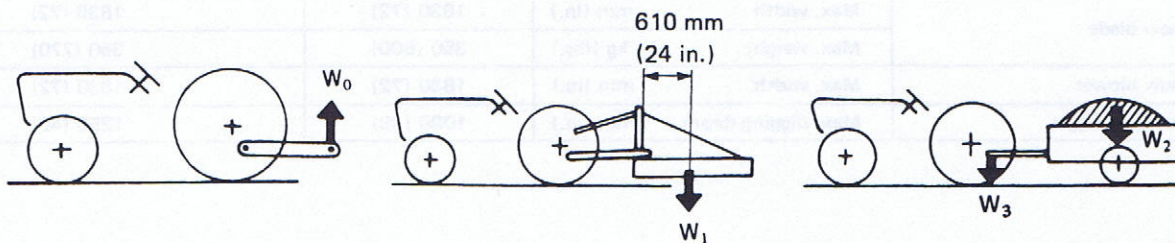

0321F113

Implement		Remarks		L3350	L3750		L4150	
				4WD	2WD	4WD	2WD	4WD
Front-end loader		Max. lifting capacity	kg (lbs.)	800 (1760)	900 (1980)			
Rotary mower	Mid mount	Max. cutting width	mm (in.)	1520 (60)	1830 (72)			
		Max. weight	kg (lbs.)	400 (880)	300 (660)			
	Rear mount	Max. cutting width	mm (in.)	1830 (72)	2130 (84)			
		Max. weight	kg (lbs.)	500 (1100)	500 (1100)			
Sickle bar		Max. cutting width	mm (in.)	1830 (72)	2130 (84)			
		Max. weight	kg (lbs.)	400 (880)	500 (1100)			
Flail mower		Max. cutting width	mm (in.)	1520 (60)	1830 (72)			
		Max. weight	kg (lbs.)	400 (880)	500 (1100)			
Rotary tiller		Max. cutting width	mm (in.)	1680 (66)	1780 (70)			
Bottom plow		Max. size		14" x 2	16" x 2		14" x 3, 16" x 2	
Chisel plow		Max. width	mm (in.)	1520 (60)	1830 (72)			
		Max. weight	kg (lbs.)	550 (1200)	680 (1500)			
Trailer		Max. load capacity	kg (lbs.)	2500 (5500)	3000 (6600)			
Cultivator	Rear mount	Max. tilling width	mm (in.)	2130 (84)	2440 (96)		2740 (108)	
		Max. weight	kg (lbs.)	400 (880)	450 (1000)		500 (1100)	
Disc harrow	Rear mount	Max. harrowing width	mm (in.)	1830 (72)	2130 (84)		2450 (98)	
		Max. weight	kg (lbs.)	300 (660)	400 (900)		450 (1000)	
	Pull type	Max. harrowing width	mm (in.)	2130 (84)	2440 (96)			
Sprayer	Rear mount	Max. tank capacity	ℓ (U.S. gals)	400 (110)	400 (110)			
	Pull type	Max. tank capacity	ℓ (U.S. gals)	1500 (400)	2000 (530)			
Speed sprayer (Pull type)		Max. blower input	Hp	32	35		40	
		Max. tank capacity	ℓ (U.S. gals)	1000 (265)	1000 (265)		2000 (550)	
Broadcaster		Max. tank capacity	ℓ (U.S. gals)	450 (120)	500 (130)			
		Max. weight	kg (lbs.)	80 (175)	100 (220)			
Lime Sower		Max. tank capacity	ℓ (U.S. gals)	350 (92)	350 (92)			
		Max. weight	kg (lbs.)	100 (220)	100 (220)			
Manure spreader		Max. load capacity	kg (lbs.)	2000 (4400)	2000(4400)	2500 (5500)		
Forage harvester		Max. cutting width	mm (in.)	1520 (60)	1520 (60)			
Baler		Max. capacity	ton/h	11	13.6			
Front blade		Max. cutting width	mm (in.)	1830 (72)	1830 (72)		2130 (84)	
Rear grader		Max. cutting width	mm (in.)	1830 (72)	1830 (72)		2130 (84)	
Box blade		Max. cutting width	mm (in.)	1670 (66)	1830 (72)			
		Max. weight	kg (lbs.)	300 (660)	400 (880)			
Back hoe		Max. digging depth	mm (in.)	2440 (96)	3000 (118)			
		Max. weight	kg (lbs.)	600 (1320)	800 (1760)			
Snow blade		Max. width	mm (in.)	1830 (72)	1830 (72)			
		Max. weight	kg (lbs.)	350 (800)	350 (770)			
Snow blower		Max. width	mm (in.)	1830 (72)	1830 (72)			
Post hole digger		Max. digging depth	mm (in.)	1000 (39)	1250 (49)			