


(3) Service Interval Alert

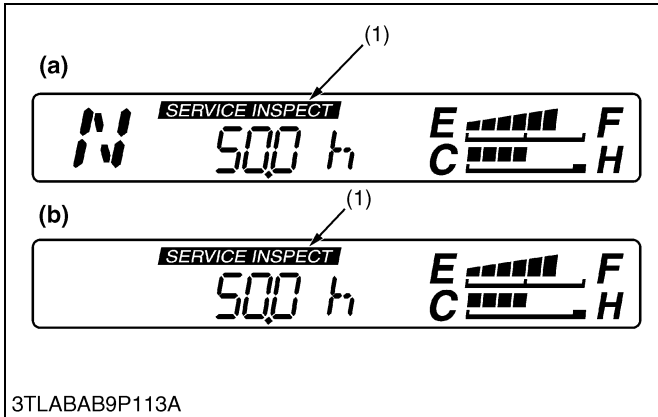

The electronic instrument panel display will alert the operator when the scheduled service is required.

■ **IMPORTANT**

- This display, **SERVICE INSPECT**, informs the operator that periodic maintenance service is due. It does not indicate system or product malfunction.

“SERVICE INSPECT”, is displayed in the ICD illuminates every 50 hours. This service alert indicator remains illuminated until the clearing operation is completed after the periodic maintenance is performed.

(Reference)

- It is possible to change to other standard display by pushing the display mode switch.


Clearing Operation :

- Keep pushing both switches (2), (3) for two seconds or more while displaying the hour meter (Normal Display 1).

- | | |
|---------------------------------------|--------------------------------------|
| (1) Periodic Service Required Readout | (a) GST and HST Model |
| (2) Display Mode Switch | (b) Manual Transmission Model |
| (3) Travel Speed Switch | |

W1018218

(4) Warning Display or Warning Information

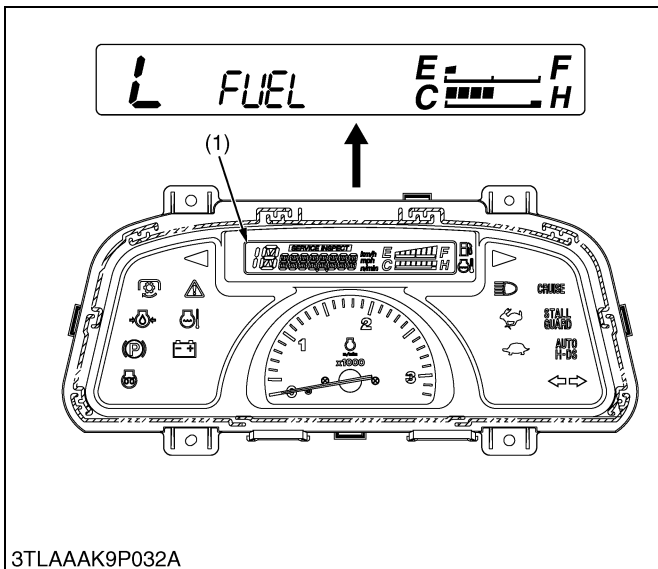

■ **Fuel Level Warning**

If the fuel in the tank goes below the prescribed level (less than approximate 5 L, 1.3 U.S.gals.), “FUEL” is displayed on the LCD (1) in the panel will come on. If this should happen during operation, refuel as soon as possible.

It is possible to return to Normal Display by pushing the display mode switch even if “FUEL” is displayed.

- (1) Liquid Crystal Display (LCD)

W1018698