




PRO-CHIP

WOOD & BRUSH CHIPPER®


**COMMERCIAL QUALITY
P.T.O. & SELF-POWERED
FLYWHEEL TYPE
CHIPPERS WITH
SELF-FEEDING
SYNCHRO-FEED
POWER FEED**

SYNCHRO-FEED
Power
Feed System
(see diagram)

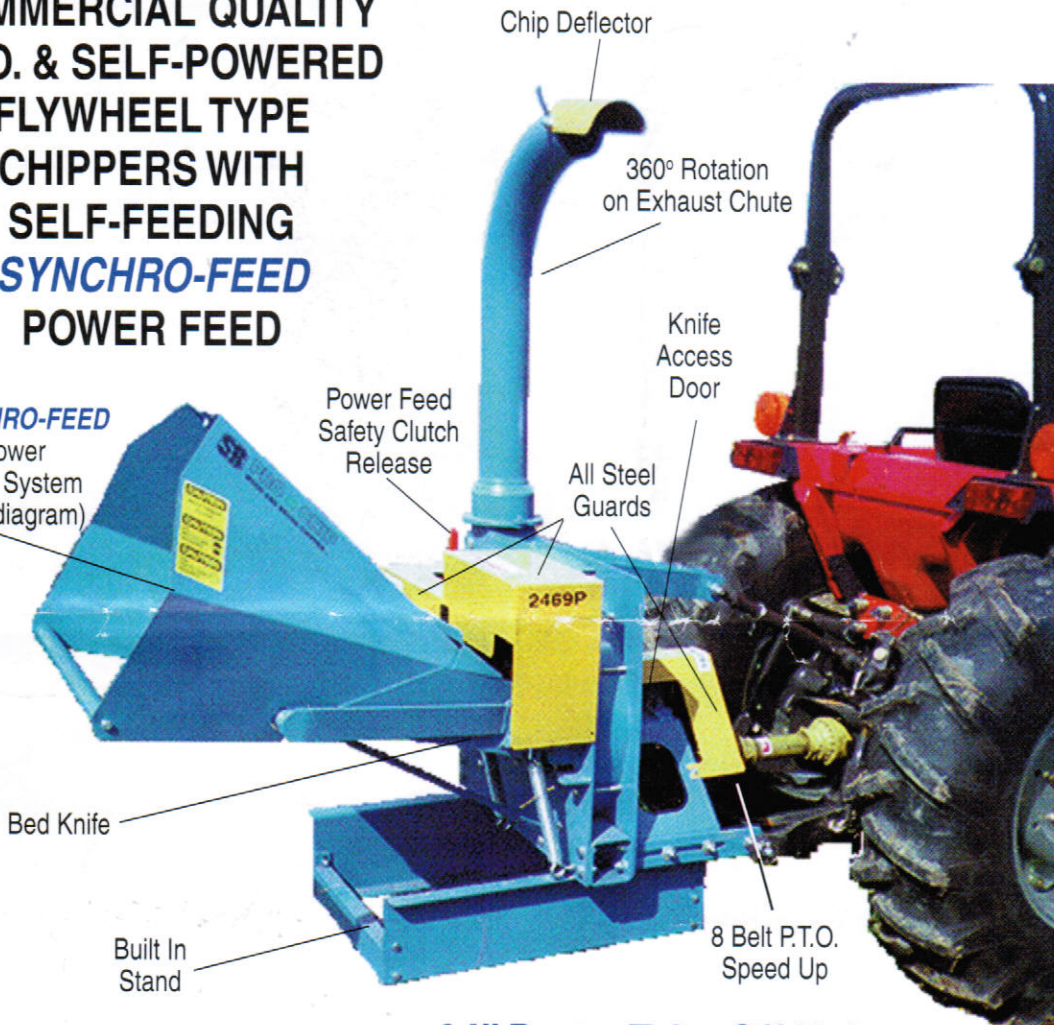

Reduce
Brush,
Limbs &
Wastewood
into Small
Recyclable
Chips in
Seconds
SAFELY!

24" Power Take-Off Unit

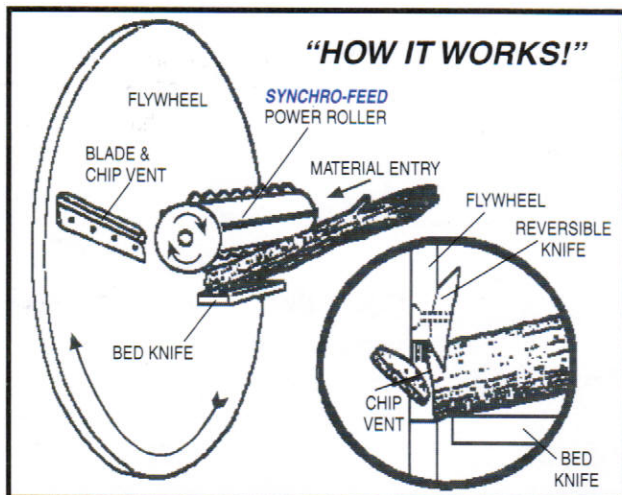

The **SR PRO-CHIP** reduces dry or green wood to small chips that make good mulch. It is a rugged flywheel and knife type chipper designed to cut fast, clean and even.

The key feature of the **SR PRO-CHIP** is the synchronized power feed roll which grips and pushes material uniformly through the flywheel blades. This eliminates clogging and dangerous kick back.

**COMMERCIAL QUALITY Wood & Brush Chippers are perfect for FARMS - RANCHES
LARGE ESTATES - ORCHARDS & VINEYARDS - CITIES & PARKS - CEMETERIES
& GOLF COURSES - LANDSCAPE & GROUND MAINTENANCE - CLEARING
& TRIMMING CONTRACTORS - EQUIPMENT RENTAL ESTABLISHMENTS**

**18" P.T.O. Models
1846P**

Design Capacity
Round Wood - 4"

Weight - 460 lbs

Length - 53"

Width - 30"

Height - 66"

Disc Size - 1.25" x 18" dia.

Speed - At 540 - 1280 rpm

Knives - 7-13/16 x 2-3/8 x 3/8
2 reversible

Bed Knife -
5-1/2 x 2-3/8 x 3/8
4 usable edges

Infeed Opening - 4" x 6"

Feed Table Length - 27"

Feed Table Height - 34"

Safety Distance
(ground to rollers) - 61"

Feed Roller - 3.5" O.D.

Infeed Rate - Synchronized
55 FPM Continuous

Discharge Height - 6'

Rotation - 360°

Flywheel Weight - 125 lbs.

Hitch - Category 1
3 pt. Mount

Tractor Engine HP
maximum - 45 hp
minimum - 18 hp



18" P.T.O. Unit

Reduces brush and trimmings to 1/10th of original volume



Quality Engineered for Durability & Safety

Operates at a Low Noise Level

Easy to Service & Maintain

Lower Power Requirements

Economical to Operate

SYNCHRO-FEED with Safety Hand Clutch

**24" P.T.O. Models
2469P**

Design Capacity
Round Wood - 6"

Weight - 600 lbs

Length - 60"

Width - 38"

Height - 72"

Disc Size - 1.25" x 24" dia.

Speed - At 540 - 1280 rpm

Knives - 10" x 2-3/8 x 3/8
2 reversible

Bed Knife -
9-3/8 x 2-3/8 x 3/8
4 usable edges

Infeed Opening - 6" x 9"

Feed Table Length - 33"

Feed Table Height - 34"

Safety Distance
(ground to rollers) - 67"

Feed Roller - 5.5" O.D.

Infeed Rate - Synchronized
62 FPM Continuous

Discharge Height - 6' 4"

Rotation - 360°

Flywheel Weight - 197 lbs.

Hitch - Category 1
3 pt. Mount

Tractor Engine HP
maximum - 85 hp
minimum - 25 hp

Appropriate Safety Equipment
MUST Be Used When Operating
the **S&R PRO-CHIP**



S&R INDUSTRIES, INC.

2005 10th Street
Baker City, OR 97814
Ph.: (541) 523-5952
FAX (541) 523-5807